


OUVRIRE CETTE PARTIE POUR LE RACCORDEMENT
OPEN THIS PART FOR CONNECTION

- NOTA: POSTE FOURNI AVEC UNE POCHEtte COMPRENANT:**
- 1 BOUCHON D'OBTURATION
 - 1 ENTREE DE CABLE TYPE ESL8C6*8 POUR CABLE Ø6 A 8 MAXI
 - 1 ENTREE DE CABLE TYPE ESL11C8*1 POUR CABLE Ø8 A 10 MAXI
 - 1 BOUCHON REDUCTEUR PE11/PE9
- NOTA: STATION IS DELIVRED WITH BAG WHO INCLUDES:**
- 1 SEALING CAP
 - 1 CABLE ENTRY TYPE ESL9C6*8 FOR Ø6/8 MAX CABLE
 - 1 CABLE ENTRY TYPE ESL11C8*10 FOR Ø8/10 MAX CABLE
 - 1 REDUCER CABLE ENTRY PE11/PE9


DESCRIPTION:
BOITIER EN ALLIAGE D'ALUMINIUM RECOUVERT D'UNE PEINTURE EPOXY.
FERMETURE DU COUVERCLE SUR JOINT PLASTIQUE IMPERDABLE PAR 4 VIS DE SECURITE EN ACIER INOXYDABLE Ø6 A 6 PANS CREUX.
EQUERRE DE FIXATION EN ACIER INOXYDABLE.
1 CARTE FEU FLASH 15JOULES REF: WK064FEF/15J , WK064CFF
RACCORDEMENT SUR BORNES A VISSER.
ENTREES DE CABLE (VOIR NOTA).
POIDS: 2.6KG.

DESCRIPTION:
CASE ALUMINIUM ALLOY, EPOXY PAINT.
COVER FIXED BY 4 STAINLESS-STEEL HEXAGONAL BOLTS.
STAINLESS-STEEL BRACKET.
1 CARD FLASH 15JOULES REF: WK064FEF/15J , WK064CFF
CONNECTION ON SCREW TERMINAL BLOCKS.
CABLE ENTRIES (SEE NOTA).
WEIGHT: 2.6KG.

RACCORDEMENT:
COUVERCLE ENLEVE
CONNECTION:
COVER REMOVED

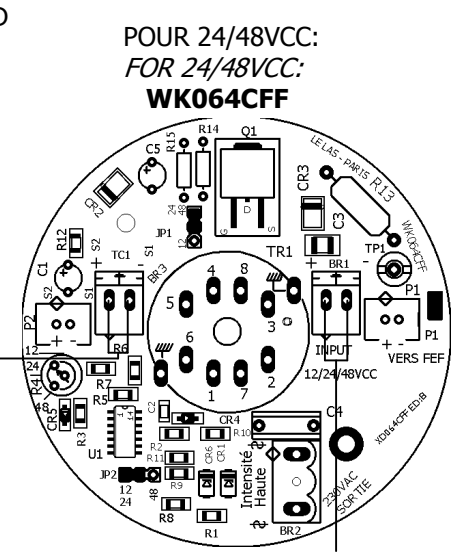

POUR 230VAC RETIRER LA CARTE WK064CFF
FOR 230VAC REMOVE CARD WK064CFF
WK064FEF/21J

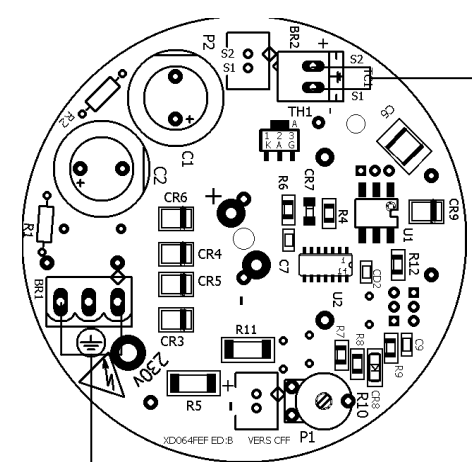

TC1 COURANT D'APPEL TELEPHONIQUE
TELEPHONE RING CURRENT

BR1 ALIMENTATION 24/48VCC
INPUT 24/48VCC

BR3 ALIMENTATION 230VCA
INPUT 230VAC

18/06/15	A	RS	1ère EMISSION/Initial issue	AB	MR
DATES	REV.	ETABLI	MODIFICATIONS	VERIFIE	APPROUVE
Dates	Rev.	Prepared	Revisions	Checked	Approved

CONSTRUCTEUR
Manufacturer **Groupe LE LAS** 34-36 Rue Roger SALENGRO F94134 FONTENAY/BOIS

MATIERE:
Material

EXECUTION:

FEU FLASH ETANCHE 21 JOULES
230 VAC OU 24/48VCC
1 OU 2 ENTRES

ECH/Scale 0:5	CARTER 218	TYPE IDW	FOLIO 1/1
FEF9405E21CA/CC			REV. A